


COMPACT LINE COMMUNICATION 8,33 KHZ

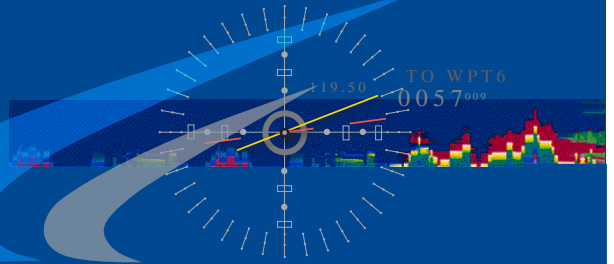

AR 6201 VHF-AM

The AR 4201 VHF-AM transceiver has, for decades, been the very synonym for reliability. More than 18.000 units have been sold over the last 20 years. The unit has proven to be a trustworthy companion for thousands of pilots flying millions of flight-hours. For many it will be difficult to acknowledge that this legendary radio is becoming technical history.

But there is good news. Becker Avionics International has launched a successor that represents a quantum leap forward in performance, technical sophistication and robustness.

The AR6201 VHF-AM transceiver is smaller and lighter than its forerunner due to implementation of state-of-art DSP (Digital Signal Processing) technology. It is mountable in the 2 ¼ inch standard instrument panel recess and is equipped with a highly efficient AM-transmitter, a very sensitive receiver and a full graphic LC-display that allows for easy reading under all light conditions, including full sun. Push button and display illumination can be dimmed. The AR 6201 is, of course, prepared for 8,33 kHz spacing that will become the new international standard for airborne communication. Switching between the 8,33 and the 25 kHz mode is therefore made effortlessly simple. Standard or dynamic microphones can be used. A built-in-test facility increases flight safety. The dual monitor mode that allows scanning of two different channels is an extra feature.

The AR6201 will continue the Becker airborne radio success story far into the 21st century. It will be available in the second quarter of 2009. Certification according ETSO-2C37e and 2C38e; TSO-C189a.

Main Features:

Frequency Range:	118.000 MHz to 136.990 MHz
Channel Spacing:	8,33 or 25 kHz
Channel Selection:	8,33 or 25 kHz (selectable)
RF-Output Power:	> 6 W
Receiver Sensitivity:	> 12dB sinad for 1 uV
Input Voltage Range:	9 VDC to 36 VDC
Operating Temperature Range:	- 20 degrees C to + 55 degrees C, for short time up to + 70 degrees C
Current consumption:	1,2 mA @ 12 VDC (transmit), 85mA @ 12 VDC (receive standby)

BECKER
AVIONICS
we bring you home